




2021  
DATASHEET  
CATALOGUE





## CONTENTS

COATED AND LAMINATED PVC FABRICS	3
CALENDERED PVC FABRICS	27
SPECIALTY FABRICS	29
WOVEN POLYETHYLENE/POLYPROPYLENE FABRICS	45
NYLON & POLYESTER FABRICS	50
KNITTED POLYETHYLENE FABRICS	59
MESH PVC PRODUCTS	62
BINDING	73
CANVAS FABRICS	76
SOLUTION DYED ACRYLIC	78
WAX CONVERTERS TEXTILES	82
INDEX	93

# DATASHEET CATALOGUE

## 2021

# COATED AND LAMINATED PVC FABRICS



# AK420

## PVC FABRIC

### APPLICATIONS

AK420 is ideal for marquees, covers, banners and sports equipment.

Roll Width	203cm
Roll Length	30 metres
Nominal Weight	520gsm
Thickness	0.40mm
Fabric Type	PVC coated polyester
Base Fabric	Woven 550dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Finish	Matte
Treatment	UV stabilised & FR treated
Colours	White, Beige, Lemon, Yellow, Orange, Red, Maroon, Pink, Purple, Light Green, Green, Olive, Light Blue, Royal Blue, Dark Blue, Grey, Black, Silver, & Fluoro Orange*
Tensile Strength (AS2001.2.3.1-2001)	Warp: 1418N/50mm Weft: 1205N/50mm
Elongation at Break	Warp: 24.3% Weft: 27.8%
Wing Rip (AS2001.2.10-1986)	Warp: 150N Weft: 103N

\*Fluoro Orange not FR Treated.



# ARCADIA

## PVC FABRIC

### APPLICATIONS

Annexe roofing, walls, caravan awnings and RV roll out awnings

Roll Width	275cm
Roll Length	30 metres
Nominal Weight	550gsm
Thickness	0.50mm
Fabric Type	PVC laminated polyester blackout
Base Fabric	Knitted 1100dtex polyester
Fabric Density	3.5 X 3.5 threads per cm <sup>2</sup>
Finish	Matte acrylic lacquer on top side
Treatment	Waterproof, UV, FR and anti fungal treated
Colours	Berrima - Maroon/Grey Newcastle - Charcoal/Grey Black Water - Charcoal
Tensile Strength [AS2001.2.3.1-2001]	Warp: 1255N/50mm Weft: 1533N/50mm
Elongation at Break	Warp: 20.8% Weft: 18.8%
Wing Rip [AS2001.2.10-1986]	Warp: 170N Weft: 260N



# BF250

## PVC FABRIC

### APPLICATIONS

PVC Banners, Aprons, Lightweight Covers and Flags

Roll Width	203cm
Roll Length	50 metres
Nominal Weight	420gsm
Thickness	0.37mm
Fabric Type	PVC laminated polyester
Base Fabric	Knitted 280dtex x 550dtex polyester
Fabric Density	7 x 4.7 threads per cm <sup>2</sup>
Finish	Matte
Treatment	UV stabilised & FR treated
Colours	Red, Lemon, Light Green, Royal Blue, White & Black
Tensile Strength [DIN53354]	Warp: 568N/50mm Weft: 812N/50mm
Elongation at Break	Warp: 15.3% Weft: 24%
Wing Rip [AS2001.2.10-1986]	Warp: 44.9N Weft: 103N



# BL650 PLUS

## PVC FABRIC

### APPLICATIONS

Heavyweight blockout fabric suitable for printing both sides

Roll Widths	137cm, 157cm & 203cm	250cm, 320cm & 500cm
Roll Length	40 metres	50 metres
Nominal Weight	650gsm	
Thickness	0.35mm	
Fabric Type	Laminated PVC	
Base Fabric	Knitted 1100dtex polyester	
Fabric Density	3.5 x 3.5 threads per cm <sup>2</sup>	
Finish	Satin	
Treatment	UV stabilised	
Colour	White	
Tensile Strength (AS 2001.2.3.1 2001)	Warp: 1569N/50mm Weft: 1320N/50mm	
Elongation at Break	Warp: 19.4% Weft: 22.4%	
Printing Compatability	 	

# BOCHINI

## TENSILE STRUCTURE FABRIC - TYPE 0

### PVC COATED FABRIC

#### APPLICATIONS

Lightweight tensioned structures, retractable roofing systems, marquees and tents.

Roll Width	300cm	
Roll Lengths	30 metres & 65 metres	
Nominal Weights	580gsm (All colours) 750gsm (Blockout only)	
Fabric Type	PVC coated material with woven polyester scrim	
Base Fabric	1000D low wick polyester	
Fabric Density	8 x 8 yarns per cm	
Fabric Finish	Glossy, both sides PVDF lacquer	
Treatment	Weldable PVDF lacquer on both sides Fire Retardant B1 (AS 1530.2-1999 & AS 1530.3-1999) Fungicide treated Anti-mildew	
Colours	White <sup>▼</sup> , Cream, Champagne, Paperbark <sup>®*</sup> , Royal Blue, Navy, Shale Grey <sup>TM*</sup> , Mid Grey, Ironstone <sup>®*</sup> , Monument <sup>®*</sup> , Black and White Blockout	
Tensile Strength	Warp: 2300 N/50mm Weft: 2300 N/50mm	
Adhesion	100N / 50mm	
Elongation at break	Warp: 22% Weft: 22%	
Tear Strength	Warp: 230N Weft: 230N	
Features	10 year warranty Lightweight Waterproof	PVDF lacquer both sides UV stabilised Low maintenance

\*Inspired by COLORBOND<sup>®</sup>

▼ Available in blockout



Colorbond<sup>®</sup>





# COASTLINE

## PVC FABRIC

### APPLICATIONS

Annexe and Marquee Walls

Roll Width	203cm
Roll Length	30 metres
Nominal Weight	580gsm
Thickness	0.53mm
Fabric Type	PVC laminated polyester
Base Fabric	Woven 550dtex polyester
Fabric Density	7 x 7 threads per cm <sup>2</sup>
Finish Top Side	Print with a matte acrylic lacquer
Finish Under Side	Linen emboss
Treatment	UV stabilised, FR treated, anti fungal and waterproof
Colours	Broome - Charcoal / Grey Tully - Black / Grey Eden - Green / Grey
Tensile Strength [AS2001.2.3.1-2001]	Warp: 1238N/50mm Weft: 1141N/50mm
Elongation at Break	Warp: 17.5% Weft: 20%
Wing Rip [AS2001.2.10-1986]	Warp: 143N Weft: 145N



# CT1000

## PVC FABRIC

### APPLICATIONS

Jumping Castles, Tents, Sports Equipment and Tarps

Roll Width	203cm
Roll Length	30 metres
Nominal Weight	630gsm
Thickness	0.54mm
Fabric Type	PVC coated polyester
Base Fabric	Woven 1100dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Finish	Matte
Treatment	UV stabilised & FR treated
Colours	White, Yellow, Orange, Red, Pink, Purple, Green, Light Blue, Royal Blue, Dark Blue, Grey and Black
Tensile Strength [AS2001.2.3.1-2001]	Warp: 2987/50mm Weft: 2660/50mm
Elongation at Break	Warp: 22.1% Weft: 29.7%
Wing Rip [AS2001.2.10-1986]	Warp: 361N Weft: 180N



# DURA-COVER

## PVC FABRIC

### APPLICATIONS

Tarps, Truck Curtains, Ute Covers and Trailer Covers

Roll Width	203cm
Roll Length	30 metres
Nominal Weight	680gsm
Thickness	0.58mm
Fabric Type	PVC coated rip-resistant polyester
Base Fabric	Woven 1100dtex polyester
Fabric Density	9 x 9 threads per cm <sup>2</sup>
Finish	High gloss acrylic lacquer on both sides
Treatment	UV stabilised & FR treated
Colours	White, Beige, Yellow, Orange, Red, Light Green, Green, Royal Blue, Dark Blue, Grey & Black
Tensile Strength [AS2001.2.3.1-2001]	Warp: 3578N/50mm Weft: 3059N/50mm
Elongation at Break	Warp: 23.1% Weft: 29.6%
Wing Rip [AS2001.2.10-1986]	Warp: 445N Weft: 451N



# EASYFLUO

## SIOEN INDUSTRIES

### PVC FABRIC

#### APPLICATIONS

Small to large tensile structures and shade sails

Products	Easyfluo Type 1	Easyfluo Type 2
Roll Width	300cm	300cm
Roll Length	50 metres	50 metres
Nominal Weight	730gsm	900gsm
Fabric Type	PVC coated PVDF, lacquer top side, acrylic lacquer bottom side	
Base Fabric	Woven 1100dtex polyester	
Fabric Finish	Both sides high-gloss finish	
Treatment	UV stabilised, FR treated & 100% recyclable	
Colour	White	White
Breaking Strength EN ISO 1421-1	Warp: 3000N/50mm Weft: 2800N/50mm	Warp: 4000N/50mm Weft: 4000N/50mm
Adhesion EN ISO 2411	100N/5cm	120N/5cm
Tear Strength DIN 53 363	Warp: 300N Weft: 300N	Warp: 600N Weft: 500N
Thickness	0.60mm	0.90mm



SIOEN



# FLUOMAX

## SIOEN INDUSTRIES

### PVC FABRIC

#### APPLICATIONS

Small to large tensile structures and shade sails

Products	Fluomax Type 0	Fluomax Type 1	Fluomax Type 2
Roll Width	250cm	250cm	250cm
Roll Length	50 metres	50 metres	100 metres
Nominal Weight	650gsm	725gsm	900gsm
Fabric Type	PVC coated PVDF lacquer both sides		
Base Fabric	Woven 1100dtex polyester		
Fabric Finish	Both sides high-gloss finish		
Treatment	UV stabilised, FR treated, 100% recyclable, low wick, microbial & fungicide protected		
Colour	White	White	White
Breaking Strength EN ISO 1421-1	Warp: 2900N/50mm Weft: 2700N/50mm	Warp: 3000N/50mm Weft: 3000N/50mm	Warp: 4300N/50mm Weft: 4200N/50mm
Adhesion EN ISO 2411	120N/5cm	120N/5cm	120N/5cm
Tear Strength DIN 53 363	Warp: 300N Weft: 300N	Warp: 300N Weft: 300N	Warp: 600N Weft: 500N
Light Transmittance	9%	8%	6.5%
Thickness	0.55mm	0.60mm	0.75mm
Warranty	10 year warranty	15 year warranty	15 year warranty

SIOEN



# LW270

## PVC FABRIC

### APPLICATIONS

Ideal for lightweight static covers, laundry bags, aprons, promotional umbrellas, tarpaulins, instant marquees, bunting, banners and fumigation covers.

Roll Width	203cm
Roll Length	50 metres
Nominal Weight	270gsm
Thickness	0.24mm
Fabric Type	PVC laminated polyester
Base Fabric	Woven 280dtex polyester
Fabric Density	9 x 8.5 threads per cm <sup>2</sup>
Finish	Matte
Treatment	UV stabilised & FR treated
Colours	White, Lemon, Light Blue/Royal Blue, Royal Blue/Light Blue, Grey & Black
Tensile Strength [AS2001.2.3.1-2001]	Warp: 447N/50mm Weft: 560N/50mm
Elongation at Break	Warp: 26.7% Weft: 25%
Wing Rip [AS2001.2.10-1986]	Warp: 41.5N Weft: 45.6N



# LW300

## PVC FABRIC

### APPLICATIONS

Fumigation Covers, Lightweight Static Covers, Tarpaulins, Instant Marquees, Bunting and Banners

<b>Roll Width</b>	320cm
<b>Roll Length</b>	300 metres & 40 metres
<b>Nominal Weight</b>	300gsm
<b>Thickness</b>	0.29mm
<b>Fabric Type</b>	PVC laminated polyester
<b>Base Fabric</b>	Knitted 840 dtex polyester
<b>Fabric Density</b>	9 x 6 threads per cm <sup>2</sup>
<b>Finish</b>	Matte
<b>Treatment</b>	UV stabilised
<b>Colour</b>	White
<b>Tensile Strength</b> [AS2001.2.3.1-2001]	Warp: 1147N/50mm Weft: 699N/50mm
<b>Elongation at Break</b>	Warp: 22.6% Weft: 22.5%
<b>Wing Rip</b> [AS2001.2.10-1986]	Weft: 142N
<b>Bursting Force</b> [AS2001.2.19-1988 Mean Steel Ball]	1002N

# NG600

## PVC FABRIC

### APPLICATIONS

Covers, Banners, Sports Equipment, Marquees, Tents and Tarpaulin Applications

Roll Width	250cm
Roll Length	30 metres
Nominal Weight	600gsm +/-3%
Thickness	0.50mm +/-0.01mm
Fabric Type	PVC coated polyester
Base Fabric	Woven 1300dtex x 1300dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Finish	Semi gloss to gloss
Treatment	Anti-mildew, anti-bacterial, UV & FR treated & one side lacquered
Colours	Red, White, Champagne, Sand, Yellow, Light Blue, Royal Blue, Teal, Dark Blue, Dark Green, Grey, Charcoal & Black
Tensile Strength (AS2001.2.3.1-2001)	Warp: 2700N/50mm Weft: 2600N/50mm
Elongation at Break	Warp: 23% Weft: 23%
Wing Rip (AS2001.2.10-1986)	Warp: 320N Weft: 300N
Breaking Strength (DIN 53354)	Warp: 2700N/50mm Weft: 2600N/50mm
Printing Compatibility	Screen print





# RF500

## PVC FABRIC

### APPLICATIONS

Annexe Roofing, Caravan Awnings, Banners, Lightweight Covers and Movie Screens

Roll Width	275cm
Roll Length	30 metres
Nominal Weight	610gsm
Thickness	0.50mm
Fabric Type	PVC laminated polyester
Base Fabric	Knitted 550dtex polyester
Fabric Density	7 x 4.7 threads per cm <sup>2</sup>
Finish	Matte
Treatment	UV stabilised, FR treated and waterproof
Colour	Botany - White / Light Grey
Tensile Strength [AS2001.2.3.1-2001]	Warp: 1456N Weft: 875N
Elongation at Break	Warp: 20.6% Weft: 29.5%
Wing Rip [AS2001.2.10-1986]	Warp: 176N Weft: 127N



# RF650

## PVC FABRIC

### APPLICATIONS

Annexe Roofing and Caravan Awnings

Roll Width	275cm
Roll Length	30 metres
Nominal Weight	650gsm
Thickness	0.55mm
Fabric Type	PVC laminated blackout polyester
Base Fabric	Knitted 1100dtex polyester
Fabric Density	4.7 x 4.7 threads per cm <sup>2</sup>
Finish	Gloss acrylic
Treatment	UV stabilised, FR treated and waterproof
Colour	Whitehaven - White / Light Grey
Tensile Strength [AS2001.2.3.1-2001]	Warp: 1859N/50mm Weft: 1714N/50mm
Elongation at Break	Warp: 19.9% Weft: 21.6%
Wing Rip [AS2001.2.10-1986]	Warp: 601N Weft: 523N



# RICKY RIPSTOP

## PVC FABRIC

### APPLICATIONS

Rip Resistant PVC Tarpaulins, Ute/Box Trailer Covers and Grain Bins

Roll Width	203cm
Roll Length	30 metres
Nominal Weight	650gsm
Thickness	0.58mm
Fabric Type	PVC coated rip-resistant polyester
Base Fabric	Woven 1100dtex polyester
Fabric Density	9 x 9 threads per cm <sup>2</sup>
Finish	Gloss acrylic lacquer on both sides
Treatment	UV stabilised & FR treated
Colours	White, Yellow, Orange, Chilli Red, Light Blue, Royal Blue, Navy, Green, Heritage Green, Light Grey, Grey, Black & Pink
Tensile Strength [AS2001.2.3.1-2001]	Warp: 3313N/50mm Weft: 3149N/50mm
Elongation at Break	Warp: 26.9% Weft: 35.3%
Wing Rip [AS2001.2.10-1986]	Warp: 480N Weft: 455N



# B8103

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Tents, Shelters, Marquees and Umbrellas

Roll Width	250cm
Roll Length	65 metres
Nominal Weight	650gsm
Thickness	0.50mm
Fabric Type	PVC coated polyester
Finish	High gloss acrylic lacquer on both sides
Base Fabric	Woven 1100dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Treatment	UV stabilised & FR treated
Colours	White, Champagne, Silver, Grey & Black
Tensile Strength <small>(AS 2001.2.3.1 2001)</small>	Warp: 3098N/50mm Weft: 2831N/50mm
Elongation At Break	Warp: 20.9% Weft: 27.7%
Wing Rip <small>(AS 2001.2 10-1986)</small>	Warp: 207N Weft: 136N



SIOEN **sio-line**<sup>®</sup>



# B8288

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Tents, Shelters, Marquees and Umbrellas

Roll Width	300cm
Roll Length	65 metres
Nominal Weight	800gsm
Thickness	0.65mm
Fabric Type	PVC coated polyester – blockout
Finish	Acrylic lacquer on both sides
Base Fabric	1100dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Treatment	UV stabilised & FR treated
Colour	White
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 2902N/50mm Weft: 2739N/50mm
Elongation At Break	Warp: 19.3% Weft: 25.1%
Wing Rip [AS 2001.2 10-1986]	Warp: 238N Weft: 108N



SIOEN **sio-line**<sup>®</sup>



# B8702

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Heavy Duty Tarpaulins, Roll-Over Tarps, Grain Bins and Ute Trailer Covers

Roll Widths	250cm & 320cm*
Roll Length	30 metres
Nominal Weight	700gsm
Thickness	0.55mm
Fabric Type	PVC coated rip resistant polyester
Finish	Gloss acrylic lacquer both sides
Base Fabric	1100dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Treatment	UV stabilised & FR treated
Colours	White*, Beige*, Yellow*, Red*, Maroon, Bottle Green, Green*, Dark Green, Mid Blue, Royal Blue*, Navy, Light Grey*, Grey* & Black*
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 3101N/50mm Weft: 2649N/50mm
Elongation at Break	Warp: 25% Weft: 17.4%
Wing Rip [AS 2001.2.10-1986]	Warp: 236N Weft: 213N

\*Available in 320cm width  
White - available in both widths

**SICEN sio-line®**



# B6000

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Ideal for truck side curtains, roll-over tarps and heavy duty tarpaulins

Nominal Weight	900gsm	
Thickness	0.72mm	
Widths	300cm	320cm
Colours	9002 White - 224 metres 1001 Yellow - 224 metres 3001 Red - 224 metres 6028 Dark Green - 224 metres 5007 Royal Blue - 224 metres 5030 Navy - 224 metres 7999 Black - 224 metres	9002 White - 30 metres, 60 metres & 224 metres 1001 Yellow - 30 metres & 60 metres 3018 Orange - 30 metres & 60 metres 3001 Red - 30 metres, 60 metres & 224 metres 3017 Maroon - 30 metres & 60 metres 6037 Green - 30 metres & 60 metres 6028 Dark Green - 30 metres, 60 metres & 224 metres 5028 Marine Blue - 30 metres, 60 metres & 224 metres 5007 Royal Blue - 30 metres, 60 metres & 224 metres 5030 Navy - 30 metres, 60 metres & 224 metres 7500 Silver# - 30 metres & 60 metres 7024 Grey - 30 metres, 60 metres & 224 metres 7999 Black - 30 metres, 60 metres & 224 metres
Fabric Type	PVC coated polyester	
Finish	Gloss acrylic lacquer both sides	
Base Fabric	Panama woven 1100dtex	
Fabric Density	12 x 12 threads per cm <sup>2</sup>	
Treatment	UV stabilised & FR treated	
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 3802N/50mm Weft: 3964N/50mm	
Elongation At Break	Warp: 25.4% Weft: 18.4%	
Wing Rip [AS 2001.2 10-1986]	Warp: 271N Weft: 259N	

#Silver non FR



Ricky Richards (Sales) Pty. Ltd | ABN 18 000 946 725

Information contained in this brochure is accurate and based on the latest product information available at the time of printing. While Ricky Richards (Sales) P/L makes all efforts to provide accurate information, we maintain the right to make changes as necessary.

[rickyrichards.com.au](http://rickyrichards.com.au)

SEPTEMBER 2021

# SPORTSMAT G2759

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Sports mats, sporting equipment and applications with genuine non-slip requirements

Roll Width	205cm
Roll Length	65 metres
Nominal Weight	600gsm
Thickness	0.75mm
Fabric Type	PVC coated polyester
Finish	Single side coated / antiskid
Base Fabric	Woven 1100 dtex polyester
Fabric Density	7.5 x 8 threads per cm <sup>2</sup>
Treatment	UV stabilised & Phthalate free
Colour	Blue
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 2678N/50mm Weft: 2479N/50mm
Elongation At Break	Warp: 18.3% Weft: 24.7%
Wing Rip [AS 2001.2 10-1986]	Warp: 182N Weft: 308N

SICEN **sio-line**<sup>®</sup>



# SPORTSMAT G2700

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Sports mats, sporting equipment and applications with genuine non-slip requirements

Roll Width	205cm
Roll Length	30 metres
Nominal Weight	700gsm
Thickness	0.55mm
Fabric Type	PVC coated polyester
Finish	Double side coated / antiskid one side
Base Fabric	Woven 1100 dtex polyester
Fabric Density	7.5 x 8 threads per cm <sup>2</sup>
Treatment	UV stabilised & Phthalate free
Colour	Grey
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 2678N/50mm Weft: 2479N/50mm
Elongation At Break	Warp: 18.3% Weft: 24.7%
Wing Rip [AS 2001.2 10-1986]	Warp: 182N Weft: 308N

SICEN **sio-line**

# TONNEAU RR & EC

## PVC FABRIC

### APPLICATIONS

Automotive tonneau covers that are ideal for utes, tabletop utes and trays

	TONNEAU RR	TONNEAU EC
Roll Width	203cm	203cm
Roll Length	30 metres	30 metres
Nominal Weight	640gsm	590gsm
Thickness	0.65mm	0.60mm
Base Fabric	Woven polyester rip resistant	Woven polyester
Treatment	UV treated	UV treated
Colour	Black / Silver underside	Black / Silver underside
Tensile Strength [AS2001.2.3.1-2001]	Warp: 3462N/50mm Weft: 1743N/50mm	Warp: 1644N/50mm Weft: 1138N/50mm
Elongation at Break	Warp: 23% Weft: 20.8%	Warp: 20.2% Weft: 16.6%
Wing Rip [AS2001.2.10-1986]	Warp: 98.4N Weft: 78.6N	Warp: 81.3N Weft: 74.8N

# CALENDERED PVC FABRICS



# GLACIER CRYSTAL CLEAR & TINT PVC

## PVC FABRIC

### APPLICATIONS

Glacier Crystal Clear & Tint PVC is ideal for restaurant enclosures, blinds, temporary glazing, marquees, motor and marine trimming

Colour/Gauge	Clear 0.65mm	Clear 0.75mm	Clear FR 0.75mm	Smoke 0.75mm	Clear 1.00mm
Width	180cm	152cm	152cm	152cm	152cm
Length	40 metres	30 metres	30 metres	30 metres	30 metres
Nominal Weight	850gsm	950gsm	950gsm	955gsm	1300gsm
Features	REACH Compliant ROHS Compliant Phthalate Free High UV Low Shrinkage				



# SPECIALTY FABRICS



# B8122 THEATRE STAGING

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Ideal for theatre staging.

<b>Roll Width</b>	300cm
<b>Roll Length</b>	50 metres
<b>Nominal Weight</b>	680 gsm
<b>Finish</b>	Gloss
<b>Colour</b>	7501 Silver / Black
<b>Fabric Type</b>	Blockout PVC 100 % PES / 1100 dtex
<b>Fabric</b> (DIN ISO 2060:1994)	100 % PES / 1100 dtex
<b>Breaking Strength</b> (ISO 1421/1:2016)	Warp: 2500 N/50mm Weft: 2300 N/50mm
<b>Tear Strength</b> (DIN 53363:2003)	Warp: 250N Weft: 200N
<b>Adhesion</b> (ISO 2411:2017)	100 N/50mm
<b>Temperature Resistance</b> (EN 1876/1:1998)	-40/+70°C
<b>Light Fastness</b> (ISO 105 B02:2014)	7-8
<b>Fire Behaviour</b>	M2 (NF P 92-507:2004) B1 (DIN 4102:1998)

SIOEN **sio-line**<sup>®</sup>

# B6353

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Rapid Speed Doors

Roll Width	250cm
Roll Length	50 metres
Nominal Weight	1450gsm
Thickness	3mm
Fabric Type	PVC / foam composite
Finish	Gloss lacquer both sides
Base Fabric	Polyester multifilament + PVC
Treatment	UV stabilised , FR Treated
Colours	White & Grey
Tensile Strength (AS 2001.2.3.1 2001)	Warp: 3700 N/50mm Weft: 2600 N / 50mm
Elongation At Break	Warp: 21.5% Weft: 27%
Wing Rip (AS 2001.2 10-1986)	Warp: 385N Weft: 346N

SICEN **sio-line**<sup>®</sup>



# C7456

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Mud Flaps, Covers, Camping and Leisure Applications

Roll Width	150cm
Roll Length	65 metres
Nominal Weight	450gsm
Thickness	0.42mm
Fabric Type	PVC coated polyester
Finish	Acrylic lacquer on one side
Base Fabric	1100 dtex polyester
Fabric Density	7 x 7 threads cm <sup>2</sup>
Treatment	UV stabilised & FR treated
Colours	Beige, Grey, Dark Grey, Black & White
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 2700N/50mm Weft: 2200N/50mm
Elongation At Break	Warp: 20% Weft: 28.5%
Wing Rip [AS 2001.2 10-1986]	Warp: 207N Weft: 119N

SIOEN **sio-line**<sup>®</sup>





# B7303 FOOD GRADE

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Packaging and coverage of food or drinking water with a PH > 4.5

Roll Width	320cm
Roll Length	65 metres
Nominal Weight	550gsm
Fabric Type	PVC coated polyester
Finish	Matte finish
Base Fabric	Woven 1100dtex polyester
Fabric Density	7 x 7 threads per cm <sup>2</sup>
Treatment	UV stabilised
Colour	Grey
Tensile Strength (AS 2001.2.3.1 2001)	Warp: 2500N/50mm Weft: 1800N/50mm
Adhesion EN ISO 2411	90N/50mm
Tear Strength DIN 53 363	Warp: 250N Weft: 250N

SICEN **sio-line**<sup>®</sup>

# B6406

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Water Bladder, Pillow Tanks and all applications where contact with water is required

Roll Width	250cm
Roll Lengths	60 metres & 200 metres
Nominal Weight	1100gsm
Thickness	0.93mm
Fabric Type	PVC coated polyester
Finish	Semi gloss
Base Fabric	Woven 1670dtex low wick polyester
Fabric Density	10.5 x 10.5 threads per cm <sup>2</sup>
Treatment	UV stabilised & water potable
Colour	Beige/Black
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 5815N/50mm Weft: 4565N/50mm
Elongation At Break	Warp: 18.7% Weft: 23.9%
Wing Rip [AS 2001.2 10-1986]	Warp: 396N Weft: 327N

SIOEN **sio-line**<sup>®</sup>

# B6501

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Ideal for inflatable bouncing pillows.

Roll Width	300cm
Roll Lengths	63 metres or 200 metres
Nominal Weight	900gsm
Thickness	0.72mm
Fabric Type	PVC coated polyester
Finish	Gloss acrylic lacquer both sides
Base Fabric	Panama woven 1100dtex polyester
Fabric Density	12 x 12 threads per cm <sup>2</sup>
Temperture Resistance	-30° / +70° C
Coating Adhesion	100N/5cm
Treatment	UV stabilised
Colours	Red 3002, Orange 3021, Yellow 1001, Blue 5020 & Green 6037
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 4376N/50mm Weft: 4322N/50mm
Elongation At Break	Warp: 21.3% Weft: 27.1%
Wing Rip [AS 2001.2 10-1986]	Warp: 318N Weft: 324N

SICEN **sio-line**<sup>®</sup>

# B6756 MACHINE PROTECTION DLG CERTIFIED

## SIO-LINE

### PVC FABRIC

#### APPLICATIONS

Ideal for machine protection, water bladder, pillow tanks and all applications where contact with water is required.

Roll Width	245cm
Roll Length	50 metres
Nominal Weight	1400gsm
Thickness	1.15mm
Fabric Type	PES & PVC
Finish	Top: Gloss Bottom: Semi gloss
Base Fabric	Warp: PES 1100 dtex Weft: PES 1670 dtex
Colours	Yellow, Light Grey & Black
Breaking Strength (ISO 1421/1:2016)	Warp: 6000 N/50mm Weft: 6000 N/50mm
Tear Strength (DIN 53363:2003)	Warp: 1200N Weft: 1200N
Adhesion (ISO 2411:2017)	125 N/50mm
Temperature Resistance (EN 1876/1:1998)	-30/+70oC
Light Fastness (ISO 105 B02:2014)	7-8
Treatment (ISO 3795:1989)	100mm/min

SIOEN **sio-line**<sup>®</sup>

# S9350 ASPHALT COVER

## SIO-LINE

**SILICONE COATED POLYESTER**

### APPLICATIONS

Asphalt Tarpaulins and Specialised Temperature Covers

Roll Width	305cm
Roll Length	50 metres
Nominal Weight	350gsm
Thickness	0.43mm
Fabric Type	Silicone coated polyester
Finish	Silicone lacquer on both sides
Base Fabric	1100dtex polyester
Fabric Density	9 x 9 threads per cm <sup>2</sup>
Treatment	UV stabilised & FR treated
Temperature Resistance	-50°C /+180°C
Colour	Black
Tensile Strength [AS 2001.2.3.1 2001]	Warp: 2731N/50mm Weft: 2888N/50mm
Elongation At Break	Warp: 21% Weft: 36.2%
Wing Rip [AS 2001.2 10-1986]	Warp: 738N Weft: 677N

37

**SICEN sio-line** 

# FRAS700

## PVC FABRIC

### APPLICATIONS

Mining or other applications where a fire retardant anti-static fabric is required

Roll Width	256cm
Roll Length	50 metres
Nominal Weight	700gsm
Thickness	0.54mm
Fabric Type	PVC laminated polyester
Base Fabric	Woven 1300dtex polyester
Fabric Density	12 x 12 threads per cm <sup>2</sup>
Finish	Matte
Treatment	UV stabilised, FR treated & anti-static
Colour	Yellow/Black
Tensile Strength [AS2001.2.3.1-2001]	Warp: 2100N/50mm Weft: 2000N/50mm
Breaking Strength	Warp: 350N Weft: 300N
FRAS 700 Complies to:	Fire resistance requirements of MDG3608, 4.2.1 Electrical resistance requirements of MDG3608, 4.2.2.1 Antistatic properties requirements for general applications of MDG3608, 7.2.2.1 Air permeability requirements of MDG3608, 4.2.3



# AQUASAFE

## PVC FABRIC

### APPLICATIONS

Tank liners, water bladders and all applications where contact with drinking water is required

<b>Roll Width</b>	205cm
<b>Roll Lengths</b>	40 metres or 200 metres
<b>Nominal Weight</b>	750gsm
<b>Thickness</b>	0.65mm
<b>Fabric Type</b>	PVC coated polyester
<b>Base Fabric</b>	Woven 1100dtex polyester
<b>Fabric Density</b>	9 x 9 threads per cm <sup>2</sup>
<b>Finish</b>	Matte
<b>Treatment</b>	UV stabilised & water potable
<b>Colour</b>	Grey
<b>Tensile Strength</b> [AS2001.2.3.1-2001]	Warp: 3098N/50mm Weft: 2509N/50mm
<b>Elongation at Break</b>	Warp: 16.99% Weft: 29%
<b>Wing Rip</b> [AS2001.2.10-1986]	Warp: 374N Weft: 346N
<b>Flex Cracking Resistance</b> [AS1441.6-1973]	Tested to 400,000 cycles

Test results available on request. Contact with drinking water AS/NZS 4020:2005

# CLEARWEAVE

## HIRAOKA

### PVC FABRIC

#### APPLICATIONS

Cafe blinds, tent/marquee walls, factory/office partitions and machine covers.

Roll Width	205cm
Roll Length	25 metres
Nominal Weight	610gsm
Thickness	0.47mm
Fabric Type	Transparent reinforced PVC with woven polyester base
Treatment	UV stabilised, anti fungal & FR tested to AS1530.2 & 1530.3
Tensile Strength [DIN53354]	Warp: 330 Weft: 325
Elongation at Break	Warp: 19% Weft: 28%
Wing Rip [AS2001.2.10-1986]	Warp: 210 Weft: 200





# HC600

## POLYESTER FABRIC

### APPLICATIONS

Heavy duty mattress cover ideal for hospital beds and correctional service applications.

Roll Width	130cm	
Roll Length	40 metres	
Nominal Weight	600gsm	
Adhesion (ASTM D751 Free Peel)	57N/50mm	
Fabric Type	Polyester base fabric PVC laminated	
Base Fabric	100% Polyester	
Finish	Diamond embossed design	
Treatment	FR retardant, anti-microbial, anti-static, anti-fungal and UV stabilised	
Colour	Charcoal	
Tensile Strength (ASTM D5034)	Warp: 2836N/50mm Weft: 2670N/50mm	
Tear Strength (Tongue) (ASTM D2261)	Warp: 382N Weft: 415N	
Features	High strength Fluid-proof Fire retardant Hypoallergenic	Anti-microbial Anti-static Stain resistant Easy to maintain

41



# MC520

## PVC FABRIC

### APPLICATIONS

Extra wide mattress covers

Roll Width	220cm
Roll Length	35 metres
Nominal Weight	520gsm
Thickness	0.42mm
Fabric Type	PVC coated polyester
Base Fabric	Woven 550dtex polyester
Fabric Density	8 x 8 threads per cm <sup>2</sup>
Finish	Linen emboss design
Treatment	Anti-mildew, anti-bacterial, FR treated and anti-static finish
Colour	Light Grey
Tensile Strength [AS2001.2.3.2-2001]	Warp: 1031N/50mm Weft: 917N/50mm
Wing Rip [AS2001.2.10-1986]	Warp: 166N Weft: 145N



# S2100 WELDING CURTAIN

## SIO-LINE

### SPECIALITY FABRIC

#### APPLICATIONS

Silicon coated technical textile (glass fibre) for welding curtains and other applications where extreme temperatures are required.

Roll Width	300cm
Roll Length	50 metres
Nominal Weight	480 gsm
Fabric Type	Silicon top & bottom
Finish	Dull/Matte
Base Fabric	Glass fibre
Treatment	PVC free, FR, withstands extreme temperature -50 °C/ +180 °C
Colours	Light Grey
Breaking Strength	Warp: 4500 N/50mm Weft: 2800 N/50mm
Tear Strength	Warp: 180N Weft: 180N

Note: Non weldable product - must be sewn.

**SIOEN** **sio-line**<sup>®</sup>

# PRICKLZ®

## CLIMBING PREVENTION SPIKES

Ideal for shade structures, any flat surface, brick fences, wall tops or any fence with a broad top rail, mortar & timber walls and thermo-forming.



**Pricklz®** by Ricky is a rigid PVC with spikes designed to minimise harm while providing maximum deterrence.

When including **Pricklz®** in your shade structure project you can help discourage people climbing and therefore reduce vandalism.

As well as being fully recyclable this easy to install product will last for years under all Australian weather conditions.

Available in a neutral grey, **Pricklz®** will easily blend in to your structure posts but can be painted if required.




### MATERIAL SPECIFICATIONS

Ricky Code:	CAPPINGFLAT
Material:	Titanium-dioxide filled PVC
UV stabilizer Level:	0.15 wt.%
Density:	1.42 g/cc
Tensile strength:	10 Mpa
Elongation:	400%
UV stability:	2000 hrs QUV (equivalent to 8 years outdoors)
Package:	Sold per carton – 100 per box

### DIMENSIONS OF SPIKE

Flat Section Spikes:	210mm (L) x 90mm (H) x 14mm (W)
----------------------	---------------------------------

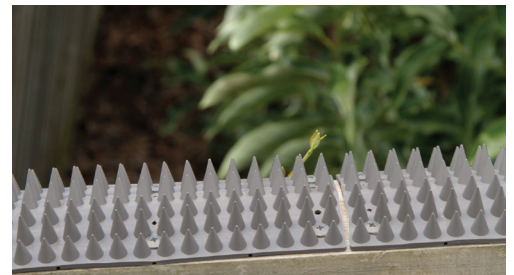

Ricky Richards (Sales) P/L

16 Park Road Homebush NSW 2140 | P 02 9735 3333 | F 02 9735 3311  
sales@rickyrichards.com.au | rickyrichards.com.au



# WOVEN POLYETHYLENE/ POLYPROPYLENE FABRICS



# PF100

## POLYETHYLENE FABRIC

### APPLICATIONS

Ground Covers, Temporary Covers, Bags, Wrapping and Painters Drop Sheets

Roll Size	91cm x 1000 metres 183cm x 100 metres
Nominal Weight	100gsm
Base Fabric	Woven 800d 10 x 8 HDPE
Treatment	UV stabilised in film only & waterproof
Colour	White



This product is available by full roll purchase only.

# PF105

## POLYETHYLENE FABRIC

### APPLICATIONS

Ground Covers, Wrapping Fabric, Patterns for Trimming and Painters Dropsheets

Roll Width	183cm
Roll Length	100 metres
Nominal Weight	105gsm
Base Fabric	Woven 630d 10 x 8
Treatment	UV stabilised in film only & waterproof
Colour	Clear (Transparent)



This product is available by full roll purchase only.

# PF130

## POLYETHYLENE FABRIC

### APPLICATIONS

Lightweight Covers, Ground Sheets, Industrial Wrapping, Grain Bunker Liners, Body Bags, Protective Floor and Wall Coverings

Roll Width	183cm
Roll Length	100 metres
Nominal Weight	130gsm
Base Fabric	Woven 750d 12 x 12 HDPE
Treatment	UV treated in film only
Colours	White, Beige & Blue



This product is available by full roll purchase only.



# PF230

## POLYETHYLENE FABRIC

### APPLICATIONS

Ideal for economy tarps, temporary covers, ground covers, bags and caravan skirts.

<b>Roll Widths</b>	All Colours: 200cm White: 50cm, 100cm & 200cm
<b>Roll Lengths</b>	All Colours: 50 metres White: 500 metres (50cm), 1000 metres (100cm) & 50 metres (200cm)
<b>Nominal Weight</b>	230gsm
<b>Thickness</b>	0.38mm
<b>Finish</b>	UV stabilised LDPE
<b>Base Fabric</b>	Woven 1100d 14 x 14 HDPE
<b>Treatment</b>	UV treated in film only & waterproof
<b>Colours</b>	Silver, Blue, White & Grey
<b>Tensile Strength</b> [AS2001.2.3.1-2001]	Warp: 1070N/50mm Weft: 985N/50mm
<b>Elongation at Break</b>	Warp: 20.6% Weft: 16.8%
<b>Wing Rip</b> [AS2001.2.10-1986]	Warp: 91N Weft: 88.8N



This product is available by full roll purchase only.

# NYLON & POLYESTER FABRICS



# 210 DENIER

## NYLON FABRIC

### APPLICATIONS

Bags, Satchels, Backpacks and Camping Applications

Roll Width	152cm
Roll Length	50 metres
Nominal Weight	120gsm
Finish	Polyurethane finish on underside
Base Fabric	Woven 210D Oxford Nylon
Colours	Red, Yellow, Royal Blue, Navy, White & Black
Thickness	0.17mm



# 420 DENIER

## NYLON FABRIC

### APPLICATIONS

Bags and Satchels

Roll Width	150cm
Roll Length	50 metres
Nominal Weight	160gsm
Finish	Polyurethane finish on underside
Base Fabric	Woven 420D Oxford Nylon
Colours	Light Blue, Royal Blue, Teal, Yellow, Bright Orange, Red, Black, White & Green



# PVC/420 DENIER NYLON

## NYLON FABRIC

### APPLICATIONS

Bags, Satchels and Accessories - One Side PVC and the Other Side Woven 420 Denier Nylon

Roll Width	147cm
Roll Length	50 metres
Nominal Weight	360gsm
Thickness	0.45mm
Treatment	Waterproof
Colours	Royal Blue & Black



# CORDURA 1000

## NYLON FABRIC

### APPLICATIONS

Bags, Satchels and General Nylon Applications

Roll Width	150cm
Roll Length	30 metres
Nominal Weight	360gsm
Fabric Type	Waterproof polyurethane finish on back, with water repellent fluorochemical finish on front
Colours	Royal Blue, Red & Black



CORDURA® is the registered trademark for INVISTA certified performance fabrics containing proprietary INVISTA fibres and in some cases, other companion fibres. When put to the test, CORDURA® is more durable than other fabrics. It's resistant to abrasions, tears and scuffs. All of the qualities you expect from a high-performance fabric. CORDURA® is a registered trademark for durable fabrics.

# SOLTERIOR FR





## SOLUTION DYED POLYESTER MADE FROM RECYCLED PET

### POLYESTER FABRIC



### APPLICATIONS

Ideal for commercial awning and umbrellas applications.

Roll Width	120cm	
Roll Length	50 metres	
Nominal Weight	448gsm	
Thickness	0.55mm	
Fabric Type	Recycled polyester from PET drink bottles	
Fabric Finish	Waterproof TPU (Polyurethane) impregnation (1000mm+)	
Treatment	UV resistance Fire retardant Waterproof	
Colours	Snow, Ivory, Taupe, Cherry, Burgundy, Marine Blue, Navy, Forest Green, Charcoal* and Midnight	
Printing Compatibility	 	
Cutting	 	
Tensile Strength (JIS L 1096 A-STRIP)	Warp: 1176 N/30mm Weft: 725 N/30mm	
Elongation at break (JIS L 1096 A-STRIP)	Warp: 70% Weft: 40%	
Tear Strength (JIS L 1096 A-1 SINGLE TONGUE)	Warp: 80N Weft: 50N	
Features	Made from recycled polyester (PET drink bottles) FR retardant (AS1530 Part 2 & 3) 5 year warranty RoHS compliant	Waterproof High UV resistance 100% recyclable

\*Charcoal available soon



# JETTY & JETTY PLUS

## 100% SOLUTION DYED POLYESTER FABRIC

	Jetty	Jetty Plus
Applications	Ideal for all marine projects, outdoor umbrellas and general cover applications.	Ideal for boat covers, car covers and general cover applications.
Roll Widths	152cm & 200cm	200cm
Roll Lengths	50 metres - 200cm 91 metres - 152cm	30 metres
Nominal Weight	255gsm	380gsm
Fabric Type	100% Solution dyed polyester with one side coated on backing	100% Solution dyed polyester with a non-woven backing
Base Fabric	Solution dyed polyester	Solution dyed polyester
Treatment	UV stabilised Anti-Fungal Waterproof	UV stabilised Anti-Fungal Waterproof
Colours	Royal Blue, Captain Navy, Navy Blue, Maroon, Forest Green, Linen, Taupe, Light Grey, Charcoal & Black	Navy Blue, Charcoal & Black
Tensile Strength (ASTM D4034-09) (Grab method)	Warp: 1750 N/50mm Weft: 1600 N/50mm	Warp: 1645 N/50mm Weft: 1465 N/50mm
Tear Strength (ASTM D1424-09) (Falling pendulum method)	Warp: 61N Weft: 55N	Warp: 64N Weft: 64N
Features	5 year uv warranty Lightweight Excellent strength per weight ratio High abrasion resistance Printable	5 year uv warranty Lightweight Excellent strength per weight ratio High abrasion resistance





# PY500

## POLYESTER FABRIC

### APPLICATIONS

Bags, Satchels, Camping Applications, Laundry Bags and Protective Covers

Roll Width	152cm
Roll Length	50 metres
Nominal Weight	220gsm
Thickness	0.24mm
Finish	Polyurethane coated underside
Base Fabric	Woven 550dtex polyester
Treatment	UV stabilised, FR treated & water resistant
Colours	Green, Black, Royal Blue, White, Maroon, Navy & Yellow



NB: This product is not suitable for long term outdoor applications.

# PY600

## POLYESTER FABRIC

### APPLICATIONS

Backpacks, Soft Sided Luggage, Sports Bags, Camera, Video/Computer Bags, Protective Covers and Bike Accessories

Roll Width	147cm
Roll Length	50 metres
Nominal Weight	310gsm
Thickness	0.42mm
Finish	Polyurethane coated underside
Treatment	UV stabilised & water resistant
Base Fabric	Woven 660dtex rip resistant polyester
Colours	Royal Blue, Black & Silver



NB: This product is not suitable for long term outdoor applications.

# KNITTED POLYETHYLENE FABRICS



# COOLSHADE

## PREMIUM MONOTAPE SHADECLOTH

### SHADE FABRIC

#### APPLICATIONS

Small to medium shade sails/shade structures, umbrellas, awnings, pergola/patio covers, privacy screens and blinds.

Roll Width	370cm straight unfolded
Roll Length	50 metres
Nominal Weight	325gsm
Fabric Type	HDPE Monofilament yarn and tape filament
Treatment	Mildew and mould resistant 100% Recyclable High UV R protection (up to 95%)
Colours	Ivory, Desert Sand, Yellow, Red, Aqua Blue, Purple, Terracotta, Dark Green, Navy, Silver, Dark Charcoal & Black
Warranty	10 year UV warranty

#### Engineering Specifications (Complies to AS4174:2018)

Breaking Force Warp (AS 2001.2.3.1-2001)	770N/50mm
Breaking Force Weft (AS 2001.2.3.1-2001)	2000N/50mm
Elongation at Break Warp	108%
Elongation at Break Weft	74%
Tear Resistance/Wing Rip Warp (AS 2001.2.10.1986)	213N
Tear Resistance/Wing Rip Weft (AS 2001.2.10.1986)	248N
Bursting Pressure (AS 2001.2.4-1990 Mean Hydraulic Diaphragm)	3800kPa
Bursting Force (AS 2001.2.19-1988 Mean Steel Ball)	1869N



# FERROSHADE®

## PROTECTION FROM THE ELEMENTS!

### SHADE FABRIC

#### APPLICATIONS

Ideal for shade sails, large shade structures, truck tarps and swimming pool covers.  
Can be used for commercial growing and provides wind protection in the horticulture industry.

Roll Width	380cm		
Roll Length	50 metres		
Nominal Weight	380gsm		
Base Fabric	Knitted HDPE Monofilament Yarn		
Fabric Density	10 x 15		
Treatment	High UV		
Colours	Night Sky®*, Charcoal, Silver, Ironstone®*, Racing Green, Navy, Orange, Royal Blue, Classic Cream™ & Ivory		
Warranty (years)	15 years		
Welding	Hot Wedge		
Cutting	Hot Knife		
Features	High wind resistance Iron strong No ongoing maintenance required	No tape yarn used 10 colours	

SHADE FABRIC RESULTS				HUMAN PROTECTION	
COLOURS	COVER FACTOR %	SHADE FACTOR %	UVR BLOCK %	UVE %	PROTECTION CATEGORY
NIGHT SKY®*	86%	86.4%	86.3%	85%	EFFECTIVE
CHARCOAL	84%	84.3%	84.5%	83%	EFFECTIVE
SILVER	79%	79.6%	79.2%	78%	N/A
IRONSTONE®*	86%	86.2%	86.4%	85%	EFFECTIVE
RACING GREEN	84%	84.0%	84.8%	83%	EFFECTIVE
NAVY	83%	82.4%	83.4%	82%	EFFECTIVE
ORANGE	80%	67.2%	81.5%	80%	EFFECTIVE
ROYAL BLUE	84%	78.9%	83.1%	83%	EFFECTIVE
CLASSIC CREAM™*	83%	66.2%	83.0%	83%	EFFECTIVE
IVORY	83%	66.1%	82.5%	82%	EFFECTIVE



Colorbond®



# MESH PVC PRODUCTS



# MEGASCREEN

## PHIFER INCORPORATED

### PVC FABRIC

#### APPLICATIONS

Truck / Boat Mesh & General Purpose Mesh Covers

Roll Widths	250cm & 300cm
Roll Length	30 metres
Colour	Black
Nominal Weight	486gsm
Thickness	0.75mm
Openess	Approx. 23%
Fabric Type	69% Vinyl compound & 31% polyester
Treatment	UV stabilised
Elongation at Break	Warp: 17.5% Weft: 21%
Tensile Strength (AS 2001.2.3.1-2001)	Warp: 2200 N/50mm Weft: 3000 N/50mm
Wing Rip (AS 2001.2.10-1986)	Warp: 159N Weft: 188N
Features	High strength to weight ratio



# MAXISCREEN

## PVC FABRIC

### APPLICATIONS

Maxiscreen is ideal for truck tarps, small shade structures, sun/privacy screens, boat screens, outdoor furniture, pet accessories, tent and annexe windows.

Roll Width	140cm	250cm	300cm
Roll Length	40 metres	30 metres	30 metres
Colours	White, Driftwood, Ocean Blue & Black	Black	Red, Forest Green, Ocean Blue, Grey & Black
Nominal Weight	400gsm		
Thickness	0.74mm		
Fabric Type	Woven PVC coated polyester yarn		
Treatment	UV stabilised		
Tensile Strength [AS2001.2.3.1-2001]	Warp: 2568N/50mm Weft: 1595N/50mm		
Elongation at Break	Warp: 22.5% Weft: 28.2%		
Wing Rip [AS2001.2.10-1986]	Warp: 203N Weft: 302N		





# OUTLOOK MODE

## PHIFER INCORPORATED

### PVC MESH

#### APPLICATIONS

Ideal for internal and external blinds, awnings and umbrellas.

Roll Widths	220cm▼, 275cm & 320cm	
Roll Length	30 metres	
Nominal Weight	540gsm	
Colours	502 Surfmist®, 539 Shale Grey™*, 564 Platinum, 526 Greystone, 551 Ash, 540 Woodland Grey®, 538 Windspray®, 541 Basalt®, 542 Monument®, 544 Eclipse▼, 510 Moonlight, 509 Flint▼, 553 Blackstone▼, 517 Chalk, 572 Porcelain, 508 Nougat, 529 Wheat, 575 Marzipan, 566 Alpaca, 504 Spice, 511 Macchiato, 507 Bamboo, 533 Mocha, 505 Silver Sky, 503 Deep Sea, 580 Pale Eucalypt®, 559 Forest Green & 597 Maroon	
Fabric Type	2 x 2 weave, PVC coated polyester mesh	
Openness	5%	
Shade Cover	95%	
Treatment	UV stabilised & FR treated	
Tensile Strength [ AS 2001.2.3.1-2001 ]	Warp: 3225N/50mm Weft: 2180N/50mm	
Elongation at Break	Warp: 29% Weft: 26%	
Wing Rip [ AS 2001.2.10-1986 ]	Warp: 161/N Weft: 119/N	
Printing Compatibility	  	
Features	Reduce solar heat gain by up to 99% Microban Dow ecolibrium Lead free	10 year warranty Greenguard gold Fire retardant

Outlook Mode fabric care, cleaning instructions and warranty information are available by request.

\*Inspired by COLORBOND®

▼Available in 220cm width



# MODE PRIVACY

## PHIFER INCORPORATED

### PVC MESH

#### APPLICATIONS

Ideal for external blinds and awnings.

Roll Width	320cm
Roll Length	20 metres
Nominal Weight	650gsm
Colours	411 Basalt <sup>®</sup> , 401 Gunmetal, 412 Monument <sup>®</sup> , 403 Storm, 408 Shadow, 400 Ebony, 407 Black Opal, 404 Paperbark, 409 Colorado, 402 Chestnut, 406 Desert & 410 Cotton
Fabric Type	2 x 2 weave, PVC coated polyester mesh
Openness	1%
Shade Cover	99%
Treatment	UV stabilised & FR treated
Features	Reduce solar heat gain by up to 99% 10 year warranty Microban Greenguard gold Dow ecolibrium Fire retardant Lead free

Outlook Mode Privacy fabric care, cleaning instructions and warranty information are available by request.

\*Inspired by COLORBOND<sup>®</sup>



# MODE TEXTURES

## PHIFER INCORPORATED

### PVC MESH

#### APPLICATIONS

Ideal for internal and external blinds and awnings.

Roll Width	320cm
Roll Length	30 metres
Nominal Weight	540gsm
Colours	909 Stucco, 900 Milky Topaz, 901 Golden Glow, 902 Havana, 903 Smokey Quartz, 905 Peppermint, 906 Blue Zircon & 907 Aniseed
Fabric Type	2 x 2 weave, PVC coated polyester mesh & Bi-colour yarn
Openness	5%
Shade Cover	95%
Treatment	UV stabilised & FR treated
Features	Reduce solar heat gain by up to 99% 10 year warranty Microban Greenguard Gold Dow Ecolibrium Fire retardant Lead free

67

Outlook Mode Textures fabric care, cleaning instructions and warranty information are available by request.



# MODE ZERO



## PHIFER INCORPORATED

### PVC MESH

#### DESCRIPTION

Outlook Mode Zero is a visual blackout mesh ideal for external blinds and awnings. With **ZERO % openness** it provides complete privacy and the ultimate protection from the sun. You control the heat, wind and rain by keeping your blinds opened or closed. Leave them half way to retain your view and keep shade over your extended living area.

Ideal for internal and external blinds, awnings and umbrellas.

Roll Width	320cm												
Roll Length	30 metres												
Nominal Weight	650gsm												
Colours	553 Blackstone, 542 Monument <sup>®</sup> , 541 Basalt <sup>®</sup> , 564 Platinum, 517 Chalk & 566 Alpaca												
Fabric Type	2 x 2 weave, PVC coated polyester mesh												
Openness	0%												
Shade Cover	100%												
Treatment	UV stabilised & FR retardant (AS 1530.2-1993 & AS/NZS 1530.3-1999)												
Tensile Strength [ AS 2001.2.3.1-2001]	Warp: 980N/50mm Weft: 3600N/50mm												
Elongation at Break	Warp: 19.5% Weft: 34.5%												
Wing Rip [ AS 2001.2.10-1986]	Warp: 58.1/N Weft: 19.9/N												
Printing Compatibility	  												
Features & Benefits	<table border="0"> <tr> <td>100% visual blackout</td> <td>Greenguard gold</td> </tr> <tr> <td>10 year warranty</td> <td>Microban<sup>®</sup></td> </tr> <tr> <td>Reduce solar heat gain</td> <td>Dow ecolibrium<sup>™</sup></td> </tr> <tr> <td>UV stabilised</td> <td>Lead free</td> </tr> <tr> <td>Colorbond<sup>®</sup> colours available</td> <td>Fire retardant (AS 1530.2-1993 &amp; AS/NZS 1530.3-1999)</td> </tr> <tr> <td>Printable</td> <td></td> </tr> </table>	100% visual blackout	Greenguard gold	10 year warranty	Microban <sup>®</sup>	Reduce solar heat gain	Dow ecolibrium <sup>™</sup>	UV stabilised	Lead free	Colorbond <sup>®</sup> colours available	Fire retardant (AS 1530.2-1993 & AS/NZS 1530.3-1999)	Printable	
100% visual blackout	Greenguard gold												
10 year warranty	Microban <sup>®</sup>												
Reduce solar heat gain	Dow ecolibrium <sup>™</sup>												
UV stabilised	Lead free												
Colorbond <sup>®</sup> colours available	Fire retardant (AS 1530.2-1993 & AS/NZS 1530.3-1999)												
Printable													

\*Inspired by COLORBOND<sup>®</sup>



# OUTLOOK DESIGNS

## PHIFER INCORPORATED

### PVC MESH

#### APPLICATIONS

Ideal for external blinds, awnings and umbrellas.

Roll Width	275cm
Roll Length	30 metres
Nominal Weight	490gsm
Colours	640 Zebra, 644 Nambucca, 662 Modena, 678 Castaway, 618 Wanda, 605 Ironbark, 636 Stradbroke, 672 Federation, 648 Daintree, 625 Palm Beach, 654 Tundra & 642 Gumleaf
Fabric Type	2 x 1 weave, PVC coated polyester mesh
Openness	12%
Shade Cover	88%
Treatment	UV stabilised
Tensile Strength [ AS2001.2.3.1-2001]	Warp: 2675N/50mm Weft: 1145N/50mm
Elongation at Break	Warp: 28% Weft: 29%
Wing Rip [ AS2001.2.10-1986]	Warp: 171N Weft: 103N
Features	Reduce solar heat gain by up to 99% 10 year warranty Microban Greenguard Gold Dow Ecolibrium Lead free

Outlook Designs fabric care, cleaning instructions and warranty information are available by request.



# SUPERSCREEN

## HIRAOKA

### PVC FABRIC

#### SUPERSCREEN 103

##### APPLICATIONS

Tarpaulins, sight screens and awnings

Roll Width	189cm
Roll Length	52 metres
Colour	Grey
Nominal Weight	430gsm
Thickness	0.75mm
Shade Factor	72%
Fabric Finish	Dip coated PVC
Treatment	UV stabilised, anti fungal & FR treated
Features	Dip coating provides a high degree of strength and stability and helps to lock the tarp in place to prevent slippage

#### SUPERSCREEN 105

##### APPLICATIONS

Load restraints, catamarans and trampoline mats

Roll Width	187cm
Roll Length	50 metres
Colour	Grey
Nominal Weight	530gsm
Thickness	1.1mm
Shade Factor	48%
Fabric Finish	Dip coated PVC
Treatment	UV stabilised, anti fungal & FR treated
Features	Dip coating provides a high degree of strength and stability and helps to lock the tarp in place to prevent slippage



# SUPERSCREEN

## HIRAOKA

### PVC FABRIC

#### SUPERSCREEN 134

##### APPLICATIONS

Small shade sails, sun/privacy screens, blinds and awanings

Roll Width	189cm
Roll Length	52 metres
Colours	White & Grey
Nominal Weight	460gsm
Thickness	0.65mm
Shade Factor	90%
Fabric Finish	Dip coated PVC
Treatment	UV stabilised, anti fungal & FR treated
Features	Dip coating provides a high degree of strength and stability and helps to lock the tarp in place to prevent slippage

#### SUPERSCREEN 239

##### APPLICATIONS

Tents, annexes and camp trailers

Roll Width	189cm
Roll Length	50 metres
Colours	Blue, Grey & Black
Nominal Weight	170gsm
Thickness	0.33mm
Shade Factor	60%
Fabric Finish	Dip coated PVC
Treatment	UV stabilised, anti fungal & FR treated
Features	Dip coating provides a high degree of strength and stability and helps to lock the tarp in place to prevent slippage



# SUPERSCREEN

## HIRAOKA

### PVC FABRIC

#### SUPERSCREEN 254

##### APPLICATIONS

Tents and quarantine covers

Roll Width	189cm
Roll Length	50 metres
Colour	Black
Nominal Weight	130gsm
Thickness	0.21mm
Shade Factor	60%
Fabric Finish	Dip coated PVC
Treatment	UV stabilised, anti fungal & FR treated
Features	Dip coating provides a high degree of strength and stability and helps to lock the tarp in place to prevent slippage

#### SUPERSCREEN 401

##### APPLICATIONS

Site fencing, truck tarps, tennis court screens and stone guards

Roll Width	189cm
Roll Length	52 metres
Colour	Dark Green, Black, Grey & Blue
Nominal Weight	440gsm
Thickness	0.67mm
Shade Factor	75%
Fabric Finish	Dip coated PVC
Treatment	UV stabilised, anti fungal & FR treated
Features	Dip coating provides a high degree of strength and stability and helps to lock the tarp in place to prevent slippage





# BINDING



# DOCRIL BINDING

## CITEL

100% SOLUTION DYED ACRYLIC BINDING

### APPLICATIONS

Ideal for blinds, awnings and marine cover trims.

Roll Size	20mm x 50 metre rolls
Colours	<p>DOCBIND001 - White</p> <p>DOCBIND003 - Yellow</p> <p>DOCBIND151 - Mustard</p> <p>DOCBIND072 - Heritage Green</p> <p>DOCBIND006 - Emerald</p> <p>DOCBIND040 - Red</p> <p>DOCBIND074 - Terracotta</p> <p>DOCBIND060 - Burgundy</p> <p>DOCBIND007 - Marine Blue</p> <p>DOCBIND077 - Navy</p> <p>DOCBIND084 - Sapphire</p> <p>DOCBIND002 - Fawn</p> <p>DOCBIND193 - Sand</p> <p>DOCBIND037 - Cappuccino</p> <p>DOCBIND005 - Chocolate</p> <p>DOCBIND067 - Grey</p> <p>DOCBIND098 - Charcoal</p> <p>DOCBIND039 - Black</p>
Treatment	<p>UV treated</p> <p>Mildew &amp; rot resistant</p>



# BRELLA BINDING

## BRADMILL

### POLYESTER/COTTON BINDING

#### APPLICATIONS

Ideal for blind and awning trims.

Roll Size	20mm x 50 metre rolls
Colours	BREBINDAM - Amethyst BREBINDBC - Burnt Chilli BREBINDBF - Blue Flint BREBINDBK - Black BREBINDBN - Bone BREBINDBU - Burgundy BREBINDCB - Classic Brown BREBINDCG - Cumberland Green BREBINDDN - Deep Navy BREBINDCI - Cinnamon BREBINDDS - Dusty Sand BREBINDGM - Gunmetal BREBINDHE - Hemp BREBINDMA - Marsh BREBINDOY - Oyster BREBINDSS - Sandstone BREBINDST - Slate BREBINDWH - White
Treatment	UV treated Mildew & rot resistant

# CANVAS FABRICS



# BARRINGTON<sup>®</sup>

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Ideal for blinds and awnings.

Roll Width	220cm
Roll Length	30 metres
Nominal Weight	540gsm +/- 5%
Colours	<b>Artisan - 17 Contemporary Designs</b> - <i>Artisan fabrics have a unique grey colour on the reverse side</i> 300 KURRI KURRI, 302 MERIDIAN, 303 NORMANDY, 304 BRANFORD, 305 MALIBU, 306 ESPERANCE, 307 BRAXTON, 308 JUNIPER, 309 SANGRIA, 310 TUSCANY, 311 FAIRHAVEN, 314 BANKSIA, 315 SHALIMAR, 316 HAMPTON, 317 TWILIGHT, 318 GLACIER & 321 SANTORINI
	<b>Jubilee - 8 Traditional Designs</b> - <i>Jubilee fabrics have a traditional green colour on the reverse side</i> 100 ASANA, 101 FREEMONT, 102 SOHO, 103 MAISON, 104 FLORENCE, 105 BANDON, 106 SAVANNAH & 107 LOGAN
	<b>Colours - 18 Vibrant Colours</b> - <i>Colours are the same colour on both the front &amp; reverse sides</i> 220 SURFMIST <sup>®</sup> , 210 ALABASTER, 213 SANDCASTLE, 205 CANYON, 219 JASPER <sup>®</sup> , 200 HAZELNUT, 206 COFFEE, 202 MERLOT, 207 ALPINE, 208 FEDERATION, 212 ADMIRAL, 214 BLUESTONE, 215 STERLING, 209 MINNOW, 218 BASALT <sup>®</sup> , 217 WOODLAND GREY <sup>®</sup> , 204 MONUMENT <sup>®</sup> & 201 MIDNIGHT
Fabric Type	52 /48 Poly/Cotton Canvas
Tear Resistance (Wing Rip) - AS2001.2.10	Warp: 70N Weft: 45N
Breaking Force (Strip Tensile) - AS2001.2.3.1	Warp: 2500 N/50mm Weft: 1700 N/50mm
Shrinkage	Warp: 3% Weft: 0%
Features	100% Australian made Poly/Cotton Canvas   Reduce solar heat gain   Assist indoor climate control   Contribute to energy savings   Low maintenance, durable & easy to clean   Maximum colour fastness & resistance to fading   Mould, mildew & stain resistant   Supported by a 10 year warranty   Cleaner solution - APEO and Solvent Free
Treatment	Water resistant Bio ultrashield (UV Stabilised & Anti microbial treatment)

Barrington fabric care, cleaning instructions and warranty information are available by request.



Ricky Richards (Sales) Pty. Ltd | ABN 18 000 946 725

Information contained in this brochure is accurate and based on the latest product information available at the time of printing. While Ricky Richards (Sales) P/L makes all efforts to provide accurate information, we maintain the right to make changes as necessary.

[rickyrichards.com.au](http://rickyrichards.com.au)

MAY 2020

# SOLUTION DYED ACRYLIC



# DOCRIL® COLOURS & DESIGNS

## CITEL

### WATER REPELLENT ACRYLIC FABRIC

#### APPLICATIONS

Blinds, awnings, umbrellas, boat covers, boat hooding and outdoor furniture.

<b>Roll Widths</b>	120cm, 153cm 200cm & 250cm (solid colours) 120cm (striped designs)
<b>Roll Lengths</b>	60 metres (120cm, 153cm & 200cm wide) 50 metres (250cm wide)
<b>Nominal Weight</b>	290gsm
<b>Finish</b>	Teflon
<b>Colours</b>	37 solid colours (120cm wide) 14 solid colours (153cm) 15 solid colours (200cm wide) 4 solid colours (250cm wide)
<b>Designs</b>	39 striped designs (120cm wide) Docril 017, Docril 361, Docril 234, Docril 172, Docril 014, Docril 501, Docril 572, Docril 317, Docril 319, Docril 636 Docril 502, Docril 140, Docril 231, Docril 322, Docril 408, Docril 407, Docril 228, Docril 504, Docril 165, Docril 661, Docril 664, Docril 365, Docril 011, Docril 028, Docril 558, Docril 430, Docril 364, Docril 670, Docril 012, Docril 323, Docril 141, Docril 432, Docril 648, Docril 669, Docril 331, Docril 362, Docril 431, Docril 447 & Docril 019
<b>Treatment</b>	Water repellent UV treated Mildew & rot resistant

COLOURS		WIDTHS			
		120cm	153cm	200cm	250cm
041	Light Grey		•	•	
675	Light Grey Tweed	•			
676	Dark Grey Tweed	•			
1000	Fossil	•			
067	Grey	•	•	•	•
677	Black Tweed	•			
114	Pepper	•			
098	Charcoal	•	•	•	•
680	Black	•	•	•	•
001	White	•			
061	Natural	•	•	•	
002	Fawn	•			
108	Pebble	•			
181	Lemon	•			
182	Sandstone	•			
086	Toffee	•			
105	Wafer	•			
081	Desert Sand	•			
197	Linen	•			
037	Cappuccino	•		•	
079	Bark	•	•	•	
106	Smoke	•			
113	Brown Tweed	•	•	•	
005	Espresso		•	•	
198	Nutmeg	•	•	•	
494	Cinnamon	•			
003	Yellow	•			
683	Flame	•			
184	Paprika	•			
107	Earth	•			
060	Burgundy	•	•	•	
492	Teal	•			
103	Empire	•			
682	Marine Blue	•	•	•	
077	Navy	•	•	•	•
084	Sapphire	•	•	•	
145	Alpine	•			
111	Clover	•			
072	Heritage Green	•	•	•	
	Docril Designs	•			

Docril® fabric care, cleaning instructions and warranty information are available by request.



# DOCRIL NAUTICA COLOURS

## CITEL

### WATERPROOF ACRYLIC FABRIC

#### APPLICATIONS

All marine projects, boat covers, boat hooding and umbrellas.

Roll Widths	153cm & 200cm
Roll Length	60 metres
Nominal Weight	315gsm
Finish	Upperside - Teflon Underside - Polyurethane
Colours	682 Marine Blue, 077 Navy, 084 Sapphire, 061 Natural, 079 Bark, 113 Brown Tweed, 198 Nutmeg, 005 Espresso, 060 Burgundy, 072 Heritage Green, 041 Light Grey, 067 Grey, 098 Charcoal & 680 Black
Treatment	Waterproof UV treated Mildew & rot resistant

Docril fabrics are manufactured using fibres that are Oeko-Tex standard 100 certified. Docril cleaning instructions and warranty information are available by request.





# DOCRIL MARINE COLOURS

## CITEL

### WATER REPELLENT ACRYLIC FABRIC

#### APPLICATIONS

All marine projects, boat covers, boat hooding, umbrellas and outdoor upholstery.

Roll Widths	153cm 200cm & 250*cm
Roll Lengths	60 metres (153cm & 200cm wide) 50 metres (250cm wide)
Nominal Weight	290gsm
Finish	Teflon
Colours	682 Marine Blue, 077 Navy*, 084 Sapphire, 061 Natural, 079 Bark, 113 Brown Tweed, 198 Nutmeg, 005 Espresso, 060 Burgundy, 072 Heritage Green, 041 Light Grey, 067 Grey*, 098 Charcoal* & 680 Black*
Treatment	Water repellent UV treated Mildew & rot resistant

\* Available in 250cm width

Docril fabrics are manufactured using fibres that are Oeko-Tex standard 100 certified. Docril cleaning instructions and warranty information are available by request.



# WAX CONVERTERS TEXTILES



# BILLABONG®

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Billabong is the highest quality, light-medium weight, blended polyester/cotton canvas tent fabric available. Billabong is a very tightly constructed fabric as it is woven from one yarn counts. Billabong is designed specifically for higher quality family frame tents and campervan roofing and walling.

Roll Width	204cm
Roll Length	50 metres
Nominal Weight	370gsm +/-30gsm
Thickness	0.46mm
Base Fabric	Woven 65/35 Poly/Cotton Plain Weave 29 ends per cm. 17 picks per cm. Yarn Count 2/20 E.C.C. x 2/20 E.C.C.
Treatment	Water penetration resistance, UV stabilised & mildew resistant
Colours	Olive, Brunswick Green, Grey, Light Sand, Light Grey, Blue Beige, Antelope, Jade, Khaki, Loomstate, Maroon, Navy, Dark Navy, Dark Green & Black
Maximum Shrinkage	Warp: 2%
Cone Test [AS 2001.2.18]	Pass
Breaking Force [AS 2001.2.3]	Warp: 1800N Weft: 1300N
Hydrostatic Force [AS 2001.2.17]	750mm min
Tear Resistance [AS 2001.2.10]	Warp: 66N Weft: 42N

83



Standard warranty



Warranty applies to applications only used for Camper Trailers



# BULLDUCK T.T™

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Bullduck T.T. has a Tearstop construction with Terylene/Cotton cospun threads woven throughout the fabric. These threads are woven in both the warp and weft directions to reinforce the tear and tensile qualities of this very strong canvas. The fabric is designed specifically for very large semi-trailer truck tarpaulins where extra strength is required. tents and campervan roofing and walling.

Roll Width	204cm
Roll Length	54 metres
Nominal Weight	535gsm +/-30gsm
Thickness	0.64mm
Base Fabric	Woven 50/50 Poly/Cotton Tearstop Weave 23.6 ends per cm. 15.3 picks per cm. Yarn Count 2/12 ECC x 2/12 ECC (2/10 Cospun tear threads)
Treatment	Water penetration resistance, UV stabilised & mildew resistant
Colours	Green, Blue, Olive, Red, Antelope, Grey, Dark Green, Beige, Black, Orange & Maroon
Maximum Shrinkage	Warp: 2%
Cone Test (AS 2001.2.18)	Pass
Breaking Force (AS 2001.2.3)	Warp: 2586N Weft: 1644N
Hydrostatic Force (AS 2001.2.17)	1000mm min
Tear Resistance (AS 2001.2.10)	Warp: 207N Weft: 125N



Standard warranty



Warranty applies to applications only used for Camper Trailers



# CANNONBALL<sup>®</sup>

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Swags, Marquees, Tepee Roofs/Walls, Temporary Shelters, Secondary under-tarps and Flat Sheet Box-Trailer Covers.

Roll Width	183cm
Roll Length	50 metres
Nominal Weight	505gsm
Base Fabric	Woven 100% Cotton plain weave 22.8 ends per cm. 15 picks per cm. Yarn count 2/12 E.C.C. x 2/12 E.C.C.
Treatment	Water penetration resistance, UV stabilised, mildew resistant
Colour	Dark Green
Shrinkage	Warp: 5-6%
Cone Test [AS 2001.2.18]	Pass
Breaking Force [AS 2001.2.3]	Warp: 1425N Weft: 1154N
Hydrostatic Force [AS 2001.2.17]	700mm min
Tear Resistance [AS 2001.2.10]	Warp: 52N Weft: 40N



Standard warranty



Warranty applies to applications only used for Camper Trailers



# COMPANION™

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Caravan Annexe and Tent Walls

Roll Width	220cm
Roll Length	50 metres (approx)
Nominal Weight	370gsm
Base Fabric	100% Polyester
Treatment	Water resistance, UV stabilised, rot & mildew resistant
Colours Stripes	CP40, CP41, CP42, CP43, CP45, CP46, CP47, CP52, CP54, CP55, CP57, CP58, CP59 (Grey backing unless otherwise stated)
Shrinkage	Warp: 2% Weft: 0%
Breaking Force [Strip Tensile AS 2001.2.3]	Warp: 2810 N/50mm Weft: 2023 N/50mm
Tear Resistance [Wing Rip AS 2001.2.10]	Warp: 77N Weft: 62N



Standard warranty



Warranty applies to applications only used for Camper Trailers



# COOLABAH™

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Coolabah is a superfine Poly/Cotton “Japara” quality tenting fabric. It has been especially designed and developed for the continental and family-style frame Tent, for both roofs and walls. Coolabah is also recommended as a high quality walling for campervans where a large amount of fabric can be folded into a tight compact area.

Roll Width	204cm
Roll Length	50 metres
Nominal Weight	275gsm
Base Fabric	Woven 65/35 Poly/Cotton Plain Weave Japara 39.4 ends per cm. 26.8 picks per cm. Yarn Count: 1/20 ECC x 1/20 ECC
Treatment	Water penetration resistance, UV stabilised, mildew resistant
Colours	Antelope, Beige, Black, Blue, Brunswick Green, Grey, Khaki, Light Grey, Light Sand & Olive
Shrinkage	Warp: 2%
Cone Test [AS 2001.2.18]	Pass
Breaking Force [AS 2001.2.3]	Warp: 1221N Weft: 1087N
Hydrostatic Force [AS 2001.2.17]	750mm min
Tear Resistance [AS 2001.2.10]	Warp: 39N Weft: 28N

87



Standard warranty



Warranty applies to applications only used for Camper Trailers



# DOUBLE PRIMED & LOOMSTATE ARTIST CANVAS

## WAX CONVERTERS TEXTILES

### ARTIST CANVAS RANGE

#### DESCRIPTION

Double-Primed Artist Canvas is coated with an acrylic base formulation to ensure maximum protection against any traces of harmful impurities that may develop over the years as a result of ageing. To achieve this, a neutralising agent is included to absorb any traces of acidic compounds. The whiteness of the canvas is enhanced by the use of Titanium Dioxide pigment of the highest purity. The material analysis of this pigment serves as a guarantee that it is free of any by-products that could affect the long-term durability of the cotton base.

Product	Weave	Base Fabric	Finish	Roll Width	Nominal Weight
<b>AC10</b>	Dehrsutie	100% Cotton	Loomstate	191cm	340g/sqm
			White Double Primed	183cm	425g/sqm
<b>ART12</b>	Plain	100% Cotton	Loomstate	203cm	390g/sqm
			Optical Bleached	200cm	390g/sqm
			White Double Primed	200cm	480g/sqm
<b>BILLABONG</b>	Plain	65/35 Poly/Cotton	Scoured	204cm	280g/sqm
<b>CD15</b>	Plain	100% Cotton	Loomstate	189cm	500g/sqm
			White Double Primed	183cm	600g/sqm
<b>COOLABAH</b>	Plain	65/35 Poly/Cotton	Scoured	204cm	210g/sqm
<b>DR8</b>	Dehrsutie	100% Cotton	Loomstate	191cm	270g/sqm
<b>DX12</b>	Plain	52/48 Poly/Cotton	Loomstate	210cm	395g/sqm
			Scoured	204cm	495g/sqm
			Black Double Primed	204cm	495g/sqm
			White Double Primed	204cm	495g/sqm





# DX 12™

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Swags, Marquee, Teepee Roofs, Walls, Temporary Shelters, Tarpaulins, Box Trailer Covers, Heavy-duty Campervan Roofs and Walls. DX12 is also perfect for annexe roofs in semi-permanent situations, as well as high quality family marquee roofs and walls.

Roll Width	204cm
Roll Length	50 metres
Nominal Weight	505gsm
Base Fabric	Woven 52/48 Poly/Cotton plain weave 22.8 ends per cm. 15 picks per cm. Yarn Count 2/12 ECC x 2/12 ECC
Treatment	Water penetration resistance, UV stabilised, mildew resistant
Colours	Brunswick Green, Grey, Light Grey, Beige, Antelope, Olive, Black, Light Sand, Blue, Khaki, Navy, Dark Green, Maroon, Bright Green, Dark Navy, Camo & Olive FR <b>Flammability:</b> Olive F/R tested to AS1530 Part 3 Results available on request
Shrinkage	Warp: 2.5%
Cone Test (AS 2001.2.18)	Pass
Breaking Force (AS 2001.2.3)	Warp: 2195N Weft: 1523N
Hydrostatic Force (AS 2001.2.17)	800mm min
Tear Resistance (AS 2001.2.10)	Warp: 116N Weft: 68N



Standard warranty



Warranty applies to applications only used for Camper Trailers



# POLYRUG T/S™

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

The Hydostatic Head and Cone Test would indicate that the fabric is perfectly waterproof. However, being a 100% polyester fabric, we suggest that this fabric is only to be used as a shower proof summer sheet for horse rugs. The base fabric is woven with either blue or white (self colour) checks.

Roll Width	202cm
Roll Length	50 metres
Nominal Weight	Loomstate 285gsm +/-30gsm Dynaproofed 380gsm +/-30gsm
Base Fabric	Woven 100% Polyester Tear Stop Weave 30 ends per cm. 14 picks per cm. Yarn Count 2/20 ECC x 2/20 ECC
Treatment	Loomstate and Dynaproofed
Colour	Blue check
Maximum Shrinkage	1% in wrap
Cone Test (AS 2001.2.18)	Pass
Breaking Force (AS 2001.2.3)	Warp: 2673N Weft: 1462N
Hydrostatic Force (AS 2001.2.17)	800mm min
Tear Resistance (AS 2001.2.10)	Warp: 206N Weft: 129N



Standard  
warranty



# RAWHIDE™

## WAX CONVERTERS TEXTILES

### CANVAS FABRIC

#### APPLICATIONS

Rawhide is a strong, tough, general purpose blended polyester/cotton canvas incorporating an attractive blue-dyed yarn overchecked to enhance the tearstop construction. The material is specifically designed for horse rugs.

<b>Roll Widths</b>	204cm & 211cm (Loomstate only)
<b>Roll Length</b>	50 metres
<b>Nominal Weight</b>	Loomstate: 410gsm Dynaproofed: 510gsm
<b>Base Fabric</b>	Woven 50/50 Poly/Cotton Tearstop Weave 23.6 ends per cm. 15.7 picks per cm. Yarn Count: 2/12 ECC x 2/12 ECC
<b>Treatment</b>	Rawhide is offered in both Loomstate (untreated – woven only) and Dynaproofed
<b>Colours</b>	Blue, Bright Green & Olive
<b>Shrinkage</b>	Warp: 2.5%
<b>Cone Test</b> [AS 2001.2.18]	Pass
<b>Breaking Force</b> [AS 2001.2.3]	Warp: 2225N Weft: 1486N
<b>Hydrostatic Force</b> [AS 2001.2.17]	800mm min
<b>Tear Resistance</b> [AS 2001.2.10]	Warp: 138N Weft: 90N



Standard warranty



Warranty applies to applications only used for Camper Trailers



# WATERPROOFING

## WAX CONVERTERS TEXTILES

### WATER PROOFING

#### APPLICATIONS

This product should be only used on old weathered industrial canvas products. Brand new covers should not be treated as the fresh canvas will not absorb any reproofing liquid and therefore is likely to stain the new cover. Home textiles, clothing items, other non-canvas materials should not be treated with canvas reproofing liquids.

	Code	Description	Detail
Waterproofing	REPROOFS2	Reproof S/based 2 litres - Clear - Reproof	Waterproofing - Solvent Based 2 Litres tins (6 per carton)
	REPROOFS20	Reproof S/based 20 litres - Clear - Reproof	Waterproofing - Solvent Based 20 Litre drum
	REPROOFS4	Reproof S/based 4 litres - Clear - Reproof	Waterproofing - Solvent Based 4 Litres tins (4 per carton)
	REPROOFW2	Reproof W/based 2 litres - Clear - Reproof	Waterproofing - Water Based 2 Litres tubs (6 per carton)
	REPROOFW4	Reproof W/based 4 litres - Clear - Reproof	Waterproofing - Water Based 4 Litres tubs (4 per carton)

92



## COATED AND LAMINATED PVC FABRICS

AK420	4
ARCADIA	5
BF250	6
BL650 PLUS	7
BOCHINI	8
COASTLINE	9
CT1000	10
DURA-COVER	11
EASYFLUO	12
FLUOMAX	13
LW270	14
LW300	15
NG600	16
RF500	17
RF650	18
RICKY RIPSTOP	19
SIO-LINE B8103	20
SIO-LINE B8288	21
SIO-LINE B8702	22
SIO-LINE B6000	23
SPORTSMAT G2759	24
SPORTSMAT G2700	25
TONNEAU EC	26
TONNEAU RR	26

## CALENDERED PVC FABRICS

GLACIER CRYSTAL CLEAR & GREY TINT	28
-----------------------------------	----

## SPECIALTY FABRICS

SIO-LINE B8122 THEATRE STAGING	30
SIO-LINE B6353 HI SPEED DOORS	31
SIO-LINE C7456 CONSTRUCTION	32
SIO-LINE B7303 FOOD AND WATER BLADDER	33
SIO-LINE B6406 BLADDERS	34
SIO-LINE B6501 JUMPING CASTLE	35
SIO-LINE B6756 MACHINE PROTECTION	36
SIO-LINE S9350 ASPHALT COVER	37
FRAS700	38
AQUASAFE	39
CLEAWEAVE	40
HC600	41
MC520	42
SIO-LINE S2100 WELDING CURTAIN	43
PRICKLZ®	44

## WOVEN POLYETHYLENE/POLYPROPYLENE FABRICS

PF100	46
PF105	47
PF130	48
PF230	49

## NYLON & POLYESTER FABRICS

NYLON 210 DENIER	51
NYLON 420 DENIER	52
PVC/420 DENIER NYLON	53
CORDURA 1000 DENIER	54
SOLTERIOR FR	55
JETTY & JETTY PLUS	56
PY500 POLYESTER	57
PY600 POLYESTER	58

## KNITTED POLYETHYLENE FABRICS

COOLSHADE	60
FERROSHADE®	61

## MESH PVC PRODUCTS

MEGASCREEN	63
MAXISCREEN	64
MODE COLOURS	65
MODE PRIVACY	66
MODE TEXTURES	67
MODE ZERO	68
OUTLOOK DESIGNS	69
SUPERSCREEN 103   105	70
SUPERSCREEN 134   239	71
SUPERSCREEN 254   401	72

## BINDING

DOCRIL® ACRYLIC BINDING	74
BRELLA BINDING	75

## CANVAS FABRICS

BARRINGTON	77
------------	----

## SOLUTION DYED ACRYLIC

DOCRIL®	79
DOCRIL® NAUTICA	80
DOCRIL® MARINE	81

## WAX CONVERTERS TEXTILES

WCT-BILLABONG®	83
WCT-BULLDUCK T.T™	84
WCT-CANNONBALL®	85
WCT-COMPANION™	86
WCT-COOLABAH™	87
WCT-DOUBLE PRIMED & LOOMSTATE ARTIST CANVAS RANGE	88
WCT-DX 12™	89
WCT-POLYRUG™	90
WCT-RAWHIDE™	91
WCT-WATERPROOFING	92



[rickyrichards.com.au](http://rickyrichards.com.au)

