



NG600 & NG680

PVC COATED POLYESTER & RIP RESISTANT PVC

COVERS & TARPAULINS

MARQUEES & TENTS

SPORTS EQUIPMENT

TRUCK CURTAINS

GRAIN BINS

BANNERS

BAGS



BUILT TOUGH FOR CHALLENGING CONDITIONS

NG600 & NG680 have your back when it comes to applications that must face the harsh elements.

These PVC fabrics are not only resistant to ripping, but also to bacteria. These fabrics won't fade because they are UV stabilised, and also fire retardant, ensuring that they're built with quality and durability. Amidst all these great features, NG600 & NG680 are also printable and come with a 2-year warranty – now that's a PVC you can rely on.



UV STABILISED

NG600 & NG680 fabrics are UV stabilised which prevents them from fading under intense UV rays. This also increases the textiles' longevity and ensures easy cleaning.



FIRE RETARDANT

NG600 & NG680 are both fire retardant, so the fabrics are designed for commercial environments. Test results available by request.



ANTI-BACTERIAL TREATMENT

NG600 & NG680 feature an anti-bacterial treatment, ensuring longevity and reliability even in challenging environments.



PRINTABLE

NG600 & NG680 are printable and is compatible with screen and digital printing methods.



2-YEAR UV WARRANTY

NG600 & NG680 fabrics are supported by a 2-year UV warranty.

COVERS & TARPAULINS




SPORTING EQUIPMENT



BAGS



NG600 COLOUR RANGE

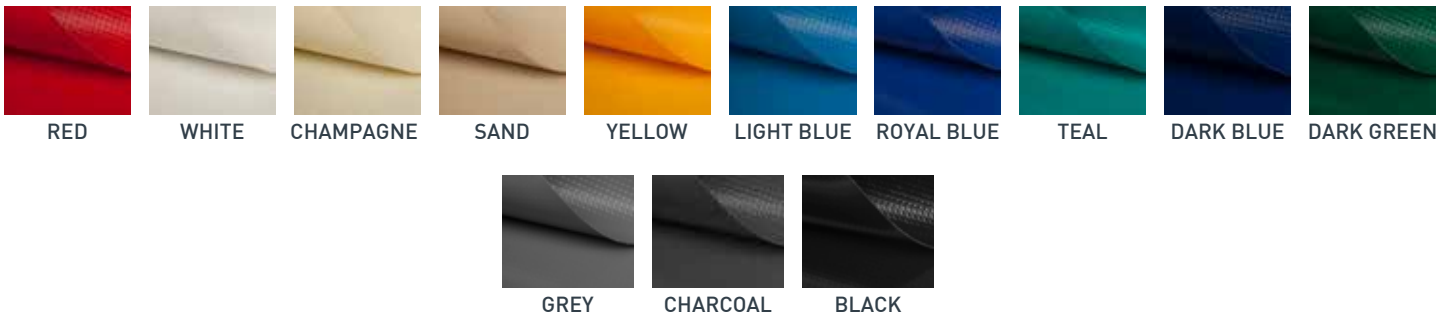

NG600 TECHNICAL SPECIFICATIONS

Roll Size	250cm x 30m	Nominal Weight	600gsm
Thickness	0.50mm	Fabric Type	PVC coated polyester
Fabric Density	8 x 8 threads per cm ²	Finish	Semi gloss to gloss with one side lacquered
Base Fabric	Woven 1300dtex x 1300dtex polyester		
Tensile Strength (AS2001.2.3.1-2001)	Warp: 2700N/50mm Weft: 2600N/50mm	Elongation at Break	Warp: 23% Weft: 23%
Wing Rip (AS2001.2.10-1986)	Warp: 320N Weft: 300N		

NG680 COLOUR RANGE



NG680 TECHNICAL SPECIFICATIONS

Roll Sizes	250cm x 30m, 320cm x 30m, 320cm x 200m*	*320cm x 200m rolls available in Royal Blue & Mid Grey only	
Nominal Weight	680gsm	Thickness	0.55mm
Fabric Type	PVC coated ripstop polyester	Fabric Density	7 x 7 ripstop threads per cm ²
Finish	Gloss	Adhesion	95N/50mm
Base Fabric	Woven 1300dtex x 1300dtex polyester	Tensile Strength (AS2001.2.3.1-2001)	Warp: 3300N/50mm Weft: 3200N/50mm
Elongation at Break	Warp: 23% Weft: 23%	Tear Strength	Warp: 340N Weft: 320N



Ricky Richards (Sales) Pty. Ltd | ABN 18 000 946 725
1300 RICKYS (1300 742 597)
sales@rickyrichards.com.au
rickyrichards.com.au

NOVEMBER 2025

Information contained in this brochure is accurate and based on the latest product information available at the time.
Please be aware that a slight colour difference may occur when using different online devices or when printed.

While Ricky Richards (Sales) P/L makes all efforts to provide accurate information,
we maintain the right to make changes as necessary.



EXPLORE
NG600



EXPLORE
NG680